

APPLICATION NOTE

MTL BARRIERS FOR USE WITH HOCHIKI I.S. DETECTORS

This Application Note covers the MTL Barriers compatible with Hochiki's Intrinsically Safe Conventional Detectors.


The two barriers manufactured by MTL and recommended by and available from Hochiki Europe are the MTL7787+ Zener Barrier and the MTL5561 Galvanic Isolator. The following Hochiki products can be utilised with these barriers:

Part No.	Description
SLR-E-IS	Intrinsically Safe Conventional Photoelectric Smoke Detector
DCD-E-IS	Intrinsically Safe Conventional Heat Detector
YBN-R/4(IS)	Intrinsically Safe Conventional Base
CCP-E-IS	Intrinsically Safe Conventional Call Point
CHQ-Z(IS)	Intrinsically Safe Compatible Dual Zone Monitor (MTL5061 only)

Application

Each type of barrier has its own application in the I.S. system, please refer to the following diagrams:

MTL7787+ ZENER BARRIER

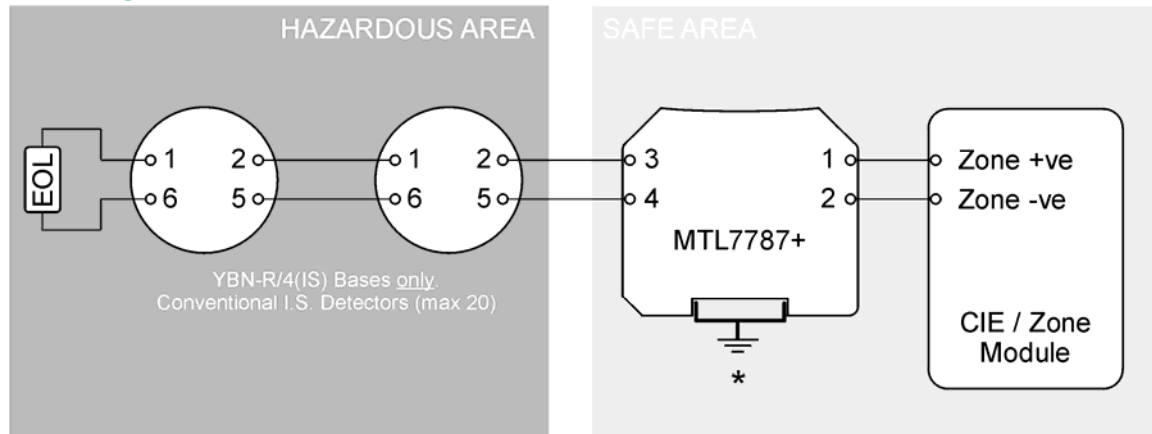


* Zener Barriers require earthing in accordance with standards (typically $<1\text{ ohm}$ to main building earth point).

Specification

Ordering Code	MTL7787+
Safety Description:	
Maximum voltage of Zener diode when fuse blows	28V
Minimum value of terminating resistor	300 Ω
Maximum short-circuit current	93mA
Number of Channels	2
Maximum end-to-end resistance	333 Ω
Working Voltage	26.6V
Maximum Voltage	27.2V
Fuse Rating (continuous)	50mA
Operating Temperature Range	-20 $^{\circ}\text{C}$ to + 60 $^{\circ}\text{C}$ (continuous working)
Storage Temperature Range	-40 $^{\circ}\text{C}$ to + 80 $^{\circ}\text{C}$
Maximum Humidity	95%RH - Non Condensing (at 40 $^{\circ}\text{C}$)
Dimensions	H90mm x W105mm x D12.6mm
Weight	140g (approx.)
Mounting Method	DX070 Box

MTL5561 GALVANIC ISOLATOR

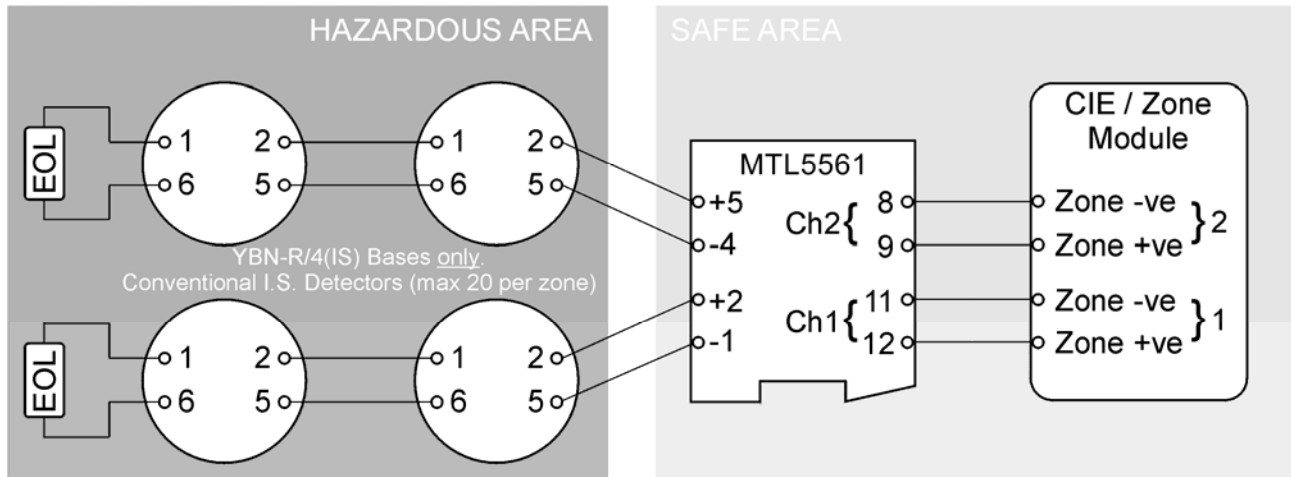

Specification	
Ordering Code	MTL5561
Safety Description:	
Maximum voltage of Zener diode when fuse blows	28V
Minimum value of terminating resistor	300Ω
Maximum short-circuit current	93mA
Number of channels	2
Current Range	1 to 40mA, nominal
Response Time to step input	Settles to within 5% of final value within 1.5ms
Maximum Output Voltage in hazardous area	28V (from 300Ω)
Transfer Accuracy at 20°C	Better than 400μA
Temperature Drift	<40μA/°C (0°C to 60°C), <15μA/°C (-20°C to 0°C)
Loop Supply Voltage	6 to 30V dc
Quiescent safe-area current at 20°C (hazardous area terminals open circuit)	<400μA at Vin = 24V dc per channel
Operating Temperature Range	-20°C to + 60°C (continuous working)
Storage Temperature Range	-40°C to + 80°C
Maximum Humidity	95%RH - Non Condensing (at 40°C)
Weight (g) / Dimensions (mm)	143 / H124 x W105 x D16
Mounting Method	DX070 Box

End of Line Resistor (EOL)

To ensure that the surface temperature of the resistor remains below that of the flash-point of the hazardous material present it is certified that the overall surface area must be greater than 230mm².

Mounting

Both types of barrier should be mounted onto standard DIN rail within a protective enclosure, such as the DX070 Box (available from Hochiki Europe). In the case of the MTL7787+ Zener barrier, the DIN rail should also be the earth source (see wiring diagram). The DX070 Box will hold up to 5 MTL7787+ Zener barriers and up to 3 MTL5561 Galvanic Isolators.



Hochiki Europe (UK) Ltd
Grosvenor Road, Gillingham Business Park,
Gillingham, Kent, ME8 0SA, England
Telephone: +44(0)1634 260133
Facsimile: +44(0)1634 260132
Email: sales@hochikieurope.com
Web: www.hochikieurope.com

Hochiki Europe (UK) Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained within this document it is not warranted or represented by Hochiki Europe (UK) Ltd. to be a complete and up-to-date description. Please check our web site for the latest version of this document.